


UNCLASSIFIED

Graph Label


Aquasonic Underwater Loudspeaker Model AQ339
 Standard Hydrophone: USRD H-52 Ser 108
 Drive Volts: 20 Vrms
 Test Distance: 2 ft.
 Test Depth: 20 ft.
 Water Temp: 52 deg F.

NUWC-Dodge Pond
 6 Dodge Court
 Niantic, CT
 Monday, October 05, 2009 10:01:21 AM

Transmit voltage response vs Frequency

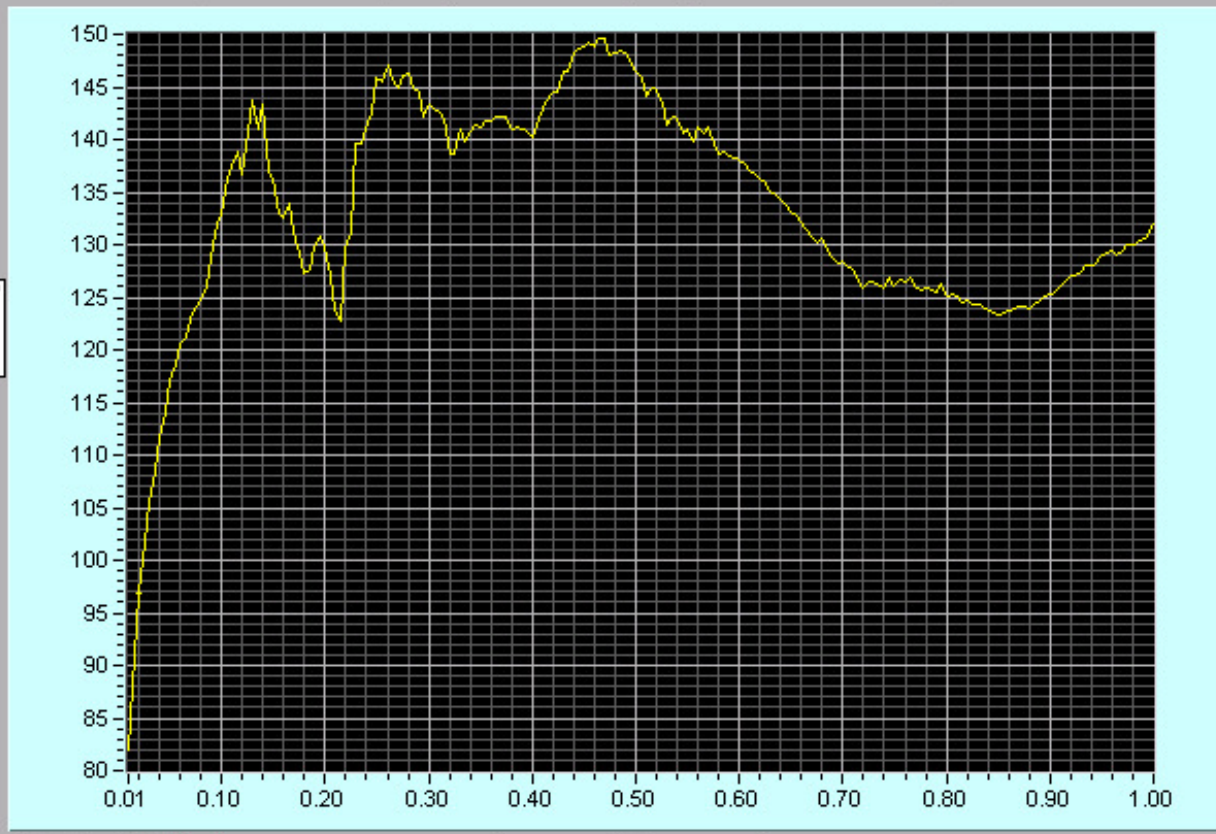

Transmit voltage response (dB/
/uPa/V @ 1m)

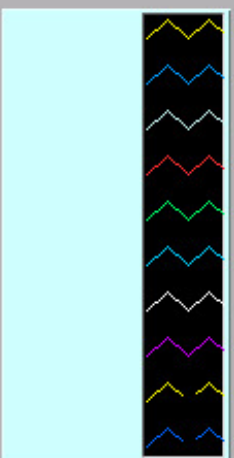

Next

Graph controls including zoom in (+), zoom out (-), and pan (hand) icons.

Frequency (kHz)

Axis Yaxis
 CURSOR 0.020 96.83

