



UNCLASSIFIED


Graph Label

LL-1424HP Ser 213 w/ AC1424HP Bridging XFRMR Box
Drive Volts: 10 Vrms
Test Distance: 2m
Test Depth: 8.5 m
Water Temp: 2.7 deg C.
Orientation: Speaker Axis (Label) at Multiple Bearings

NUWC-Dodge Pond
6 Dodge Court
Niantic, CT
Tuesday, March 05, 2013 1:39:40 PM

Transmit voltage response vs Frequency

Transmit voltage response (dB/
/uPa/V @ 1m)

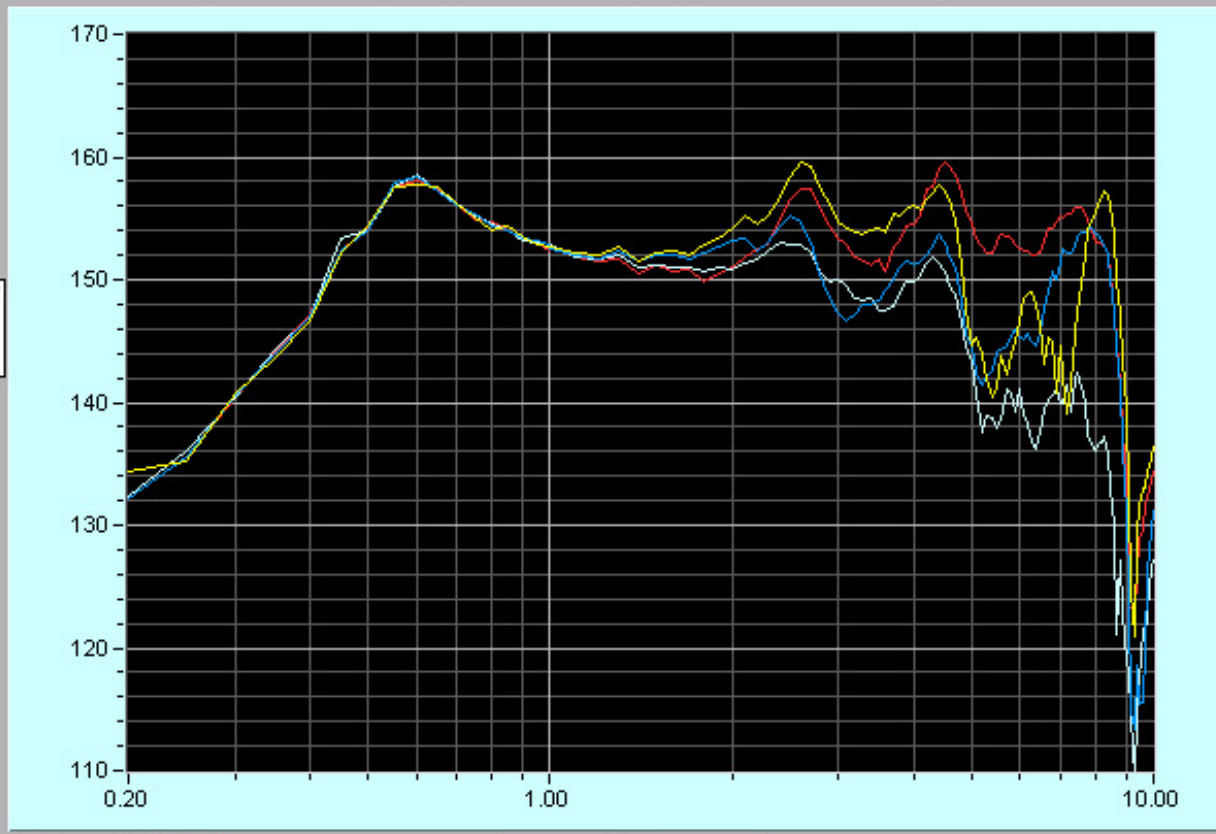

- 0 deg
- 30 deg
- 60 deg
- 90 deg

Next



Frequency (kHz)

Axis Yaxis
CURSOR 2.700 157.13

