


LUBELL LABS UW30AR ADAPTER RING & A9022 GRILLE

Mounts UW30 U/W speaker into Pentair 78210XXX or Hayward SP0604C SS niche only

Includes: One UW30AR SS adapter ring with six 1/4-28 x 1/2" SS socket set-screws, six 10-32 x 1/4" SS pan head mach screws, one A9022 SS speaker grille with one 10-24 x 3/4" SS oval head mach screw. All parts are high quality pool-grade 304L stainless steel. Use UL listed potting compound (such as AquaBond AB-1000) on all threads.

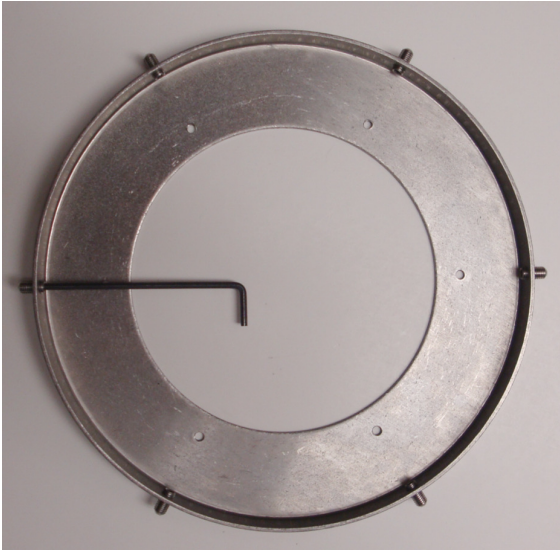

Step 1: Install six 1/4-28 set-screws w/ cup end facing outwards using 1/8" hex wrench.



Step 2: Place ring into bonded & grounded UL listed stainless steel niche only, about 1" from front; tighten screws evenly & firmly.




Step 3: Pull UW30 speaker cable thru conduit to J-box. Seal conduit opening in niche per code as required. Insert speaker and install six 10-32 x 1/4 machine screws.



Step 4: Install A9022 stainless steel grille, snug screw down but do not overtighten.

A9000 Speaker Niche Placement Detail For Bosch University Sound UW-30 U/W Speaker

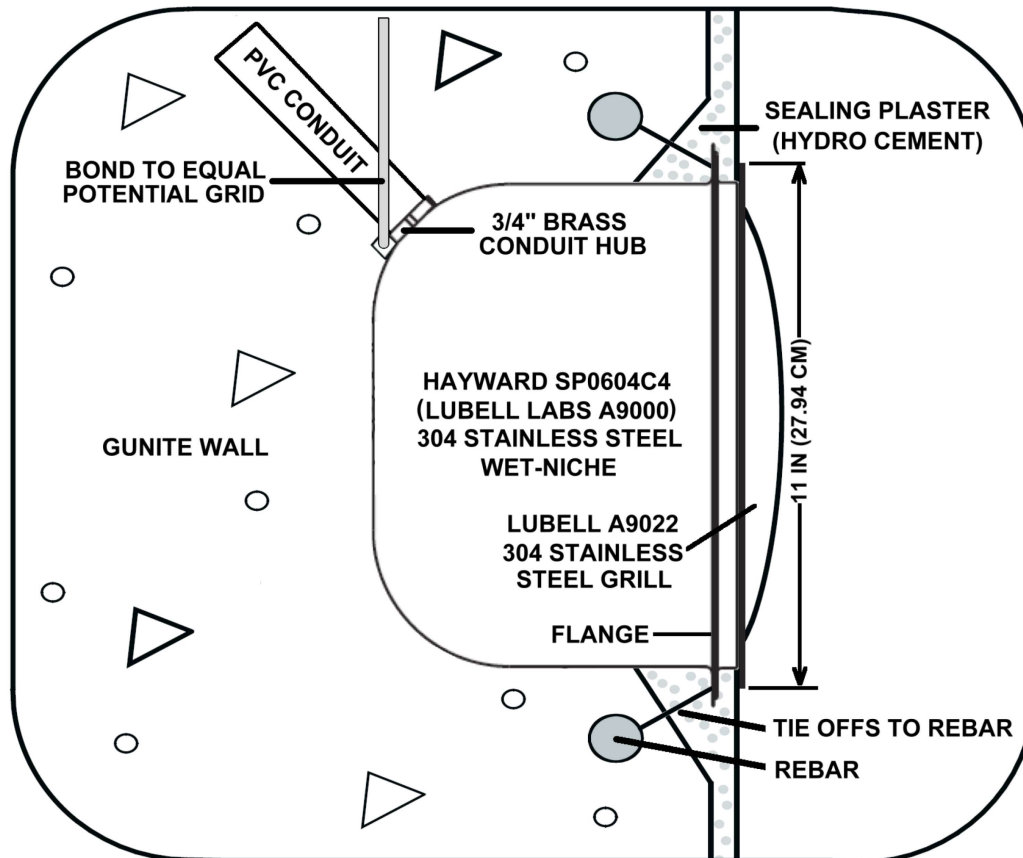

Recommended installation depth (per EV / Telex brochure 38109-847 Rev A):

1.2 m (4.0 ft)